

# Grate Inlet Filter Media Type




## OPERATION & MAINTENANCE

## OPERATION & MAINTENANCE

The Bio Clean Grate Inlet Media Filter is a stormwater device designed to remove high levels of trash, debris, sediments, hydrocarbons, metals, nutrients and bacteria. The media filter is available in several configurations including trash full capture, multi-level screening, Kraken membrane filter and media filter variations. This manual covers maintenance procedures of the media filter configurations. This filter is made of 100% stainless steel and is available in various sizes and depths allowing it to fit in any grated catch basin inlet. The filter's heavy duty construction allows for cleaning with any vacuum truck. The filter can also easily be cleaned by hand.

As with all stormwater BMPs, inspection and maintenance on the Grate Inlet Media Filter is necessary. Stormwater regulations require BMPs be inspected and maintained to ensure they are operating as designed to allow for effective pollutant removal and provide protection to receiving water bodies. It is recommended that inspections be performed multiple times during the first year to assess site-specific loading conditions. This is recommended because pollutant loading can vary greatly from site to site. Variables such as nearby soil erosion or construction sites, winter sanding of roads, amount of daily traffic and land use can increase pollutant loading on the system. The first year of inspections can be used to set inspection and maintenance intervals for subsequent years. Without appropriate maintenance a BMP can exceed its storage capacity which can negatively affect its continued performance in removing and retaining captured pollutants.

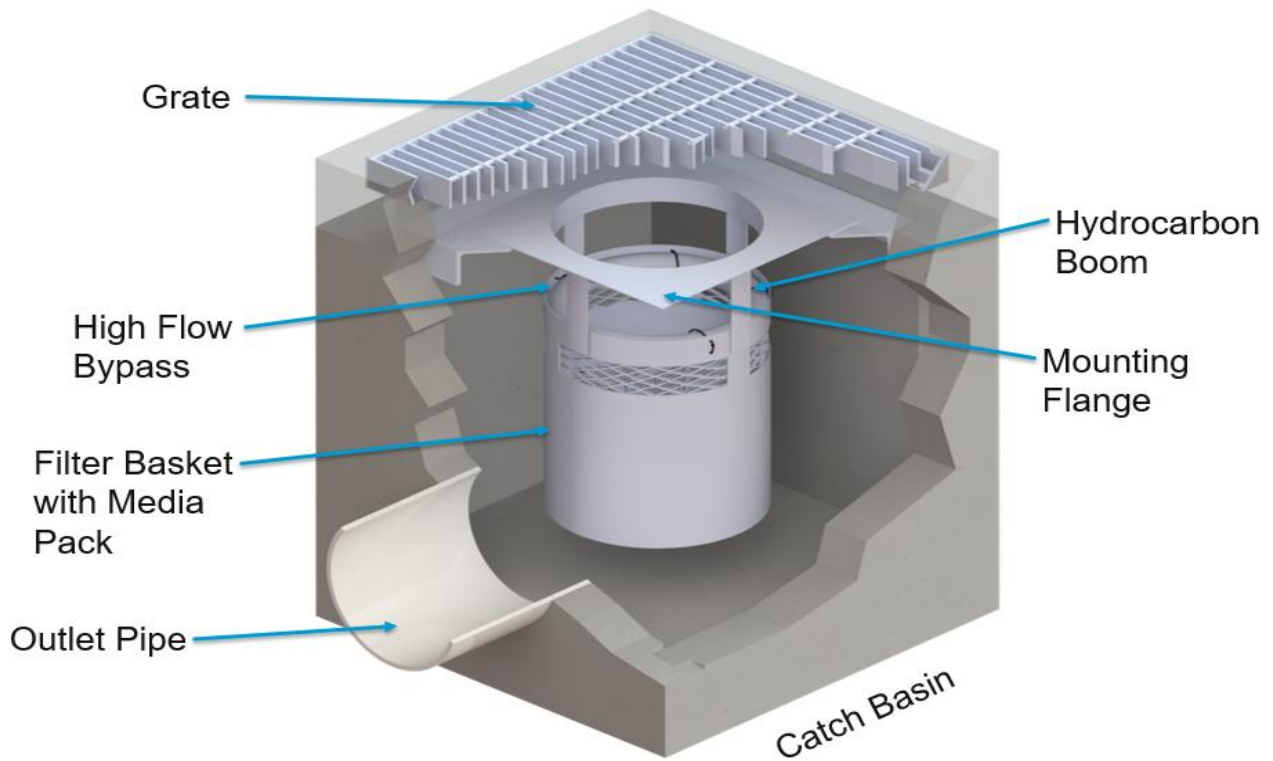

**System Diagram:**

### *Inspection Equipment*

Following is a list of equipment to allow for simple and effective inspection of the Grate Inlet Media Filter:

- Bio Clean Environmental Inspection Form (contained within this manual).
- Manhole hook or appropriate tools to remove access hatches and covers.
- Appropriate traffic control signage and procedures.
- Protective clothing and eye protection.
- Note: entering a confined space requires appropriate safety and certification. It is generally not required for routine inspections or maintenance of the system.



### *Inspection Steps*

The core to any successful stormwater BMP maintenance program is routine inspections. The inspection steps required on the Grate Inlet Media Filter are quick and easy. As mentioned above the first year should be seen as the maintenance interval establishment phase. During the first year more frequent inspections should occur in order to gather loading data and maintenance requirements for that specific site. This information can be used to establish a base for long-term inspection and maintenance interval requirements.

The Grate Inlet Media Filter can be inspected through visual observation. All necessary pre-inspection steps must be carried out before inspection occurs, such as safety measures to protect the inspector and nearby pedestrians from any dangers associated with an open grated inlet. Once the grate has been safely removed the inspection process can proceed:

- Prepare the inspection form by writing in the necessary information including project name, location, date & time, unit number and other info (see inspection form).
- Observe the filter with the grate removed.
- Look for any out of the ordinary obstructions on the grate or in the filter and its bypass. Write down any observations on the inspection form.
- Through observation and/or digital photographs estimate the amount of trash, foliage and sediment accumulated inside the filter basket. Record this information on the inspection form.
- Observe the condition and color of the hydrocarbon boom and filtration media. Record this information on the inspection form.
- Finalize inspection report for analysis by the maintenance manager to determine if maintenance is required.

### *Maintenance Indicators*

Based upon observations made during inspection, maintenance of the system may be required based on the following indicators:

- Missing or damaged internal components.
- Obstructions in the filter basket and its bypass.
- Excessive accumulation of trash, foliage and sediment in the filter basket. Maintenance is required when the basket is greater than half-full.
- Filtration media is clogged.
- The following chart shows the 50% and 100% storage capacity of each filter height:

<b>Model</b>	<b>Filter Basket Diameter (in)</b>	<b>Filter Basket Height Above Media Chamber (in)</b>	<b>50% Storage Capacity (cu ft)</b>	<b>100% Storage Capacity (cu ft)</b>
<b>BC-GRATE-12-12-12</b>	10.00	4.00	0.09	0.18
<b>BC-GRATE-18-18-18</b>	16.00	10.00	0.58	1.16
<b>BC-GRATE-24-24-24</b>	21.00	16.00	1.60	3.21
<b>BC-GRATE-30-30-24</b>	27.00	16.00	2.65	5.30
<b>BC-GRATE-36-36-24</b>	33.00	16.00	3.96	7.92
<b>BC-GRATE-48-48-18</b>	44.00	10.00	4.40	8.79

### *Maintenance Equipment*

It is recommended that a vacuum truck be utilized to minimize the time required to maintain the Curb Inlet Filter, though it can easily be cleaned by hand:


- Bio Clean Environmental Maintenance Form (contained in O&M Manual).
- Manhole hook or appropriate tools to remove the grate.
- Appropriate safety signage and procedures.
- Protective clothing and eye protection.
- Note: entering a confined space requires appropriate safety and certification. It is generally not required for routine maintenance of the system. Small or large vacuum truck (with pressure washer attachment preferred).

### *Maintenance Procedures*

It is recommended that maintenance occurs at least two days after the most recent rain event to allow debris and sediments to dry out. Maintaining the system while flows are still entering it will

increase the time and complexity required for maintenance. Cleaning of the Grate Inlet Filter can be performed utilizing a vacuum truck. Once all safety measures have been set up cleaning of the Grate Inlet Media Filter can proceed as followed:

- Remove grate (traffic control and safety measures to be completed prior).
- Using an extension on a vacuum truck position the hose over the opened catch basin. Insert the vacuum hose down into the filter basket and suck out trash, foliage and sediment. A pressure washer is recommended and will assist in spraying of any debris stuck on the side or bottom of the filter basket. Power wash off the filter basket sides and bottom.
- Next remove the hydrocarbon boom that is attached to the inside of the filter basket. The hydrocarbon boom is fastened to rails on two opposite sides of the basket (vertical rails). Assess the color and condition of the boom using the following information in the next bullet point. If replacement is required install and fasten on a new hydrocarbon boom. Booms can be ordered directly from the manufacturer.
- Follow is a replacement indication color chart for the hydrocarbon booms:

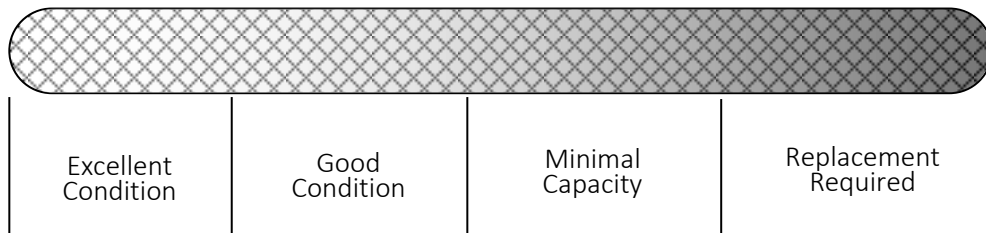

- The access the media chamber pull up on the handle of the removable top screen. The media is installed as loose granules in this chamber. Based on the inclusion of sediments within the media along with assessment of the media color and condition using the following information in the next bullet point. If replacements is required vacuum out the filter media using the vacuum truck. Once vacuumed out use the pressure washer to spay clean the bottom screen, the sides and the removable top screen. The chamber is now ready to accept new filter media which can be ordered directly from the manufacturer.
- Follow is a replacement indication color chart for the filter media:




- The last step is to replace the grate and remove all traffic control.

- All removed debris, filter media and pollutants shall be disposed of following local and state requirements.
- Disposal requirements for recovered pollutants may vary depending on local guidelines. In most areas the sediment, once dewatered, can be disposed of in a sanitary landfill. It is not anticipated that the sediment would be classified as hazardous waste.
- In the case of damaged components, replacement parts can be ordered from the manufacturer. Hydrocarbon booms can also be ordered directly from the manufacturer as previously noted.

*Maintenance Sequence*

Remove grate and set up vacuum truck to clean the filter basket.



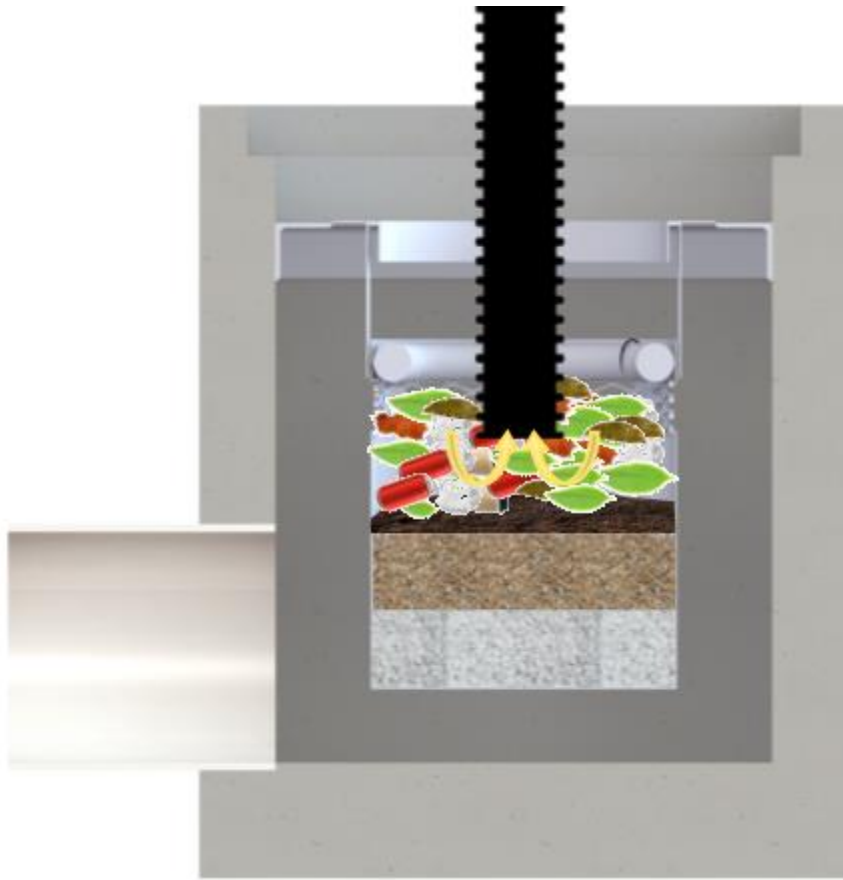


Insert the vacuum hose down into the filter basket and suck out debris. Use a pressure washer to assist in vacuum removal. Pressure wash off screens.




Remove the hydrocarbon boom that is attached to the inside of the filter basket. Replace if necessary. Next lift out removable top screen by the handle to gain access to the media filter chamber below. Assess the condition of the media and if needed prepare the vacuum hose to suck out the spent media.



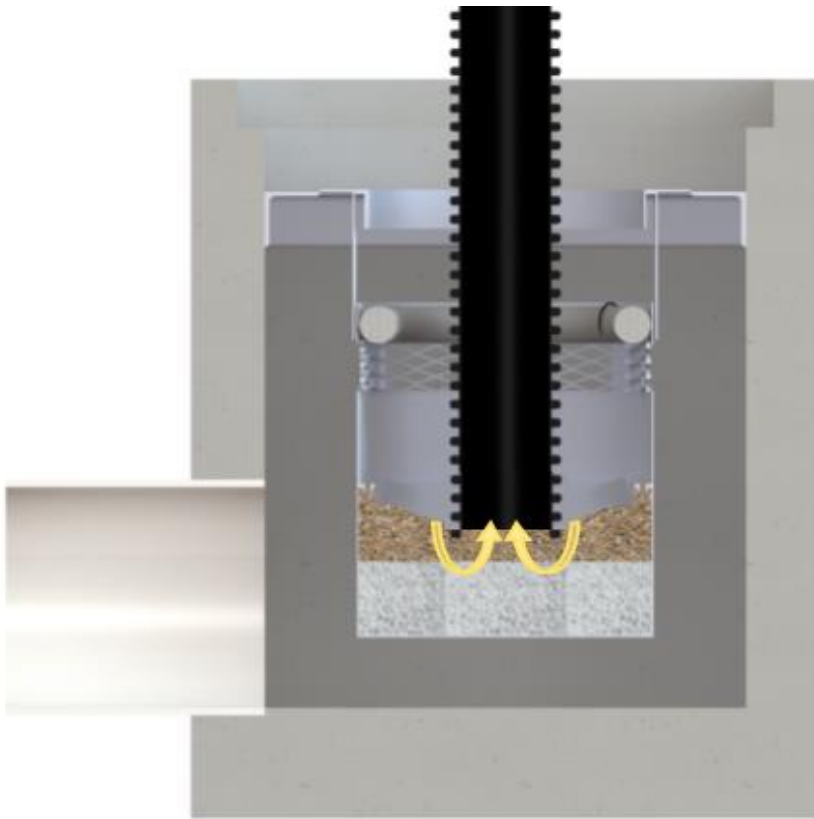


Insert the vacuum hose down into the media filter chamber and suck out spent media. Use a pressure washer to assist in vacuum removal. Pressure wash off screens at the bottom along the removable top screen.

Replace filter media (in bulk) into the media filter chamber. Replacement media can be ordered from the manufacturer. Once full the removable top screen can be placed and locked into place.

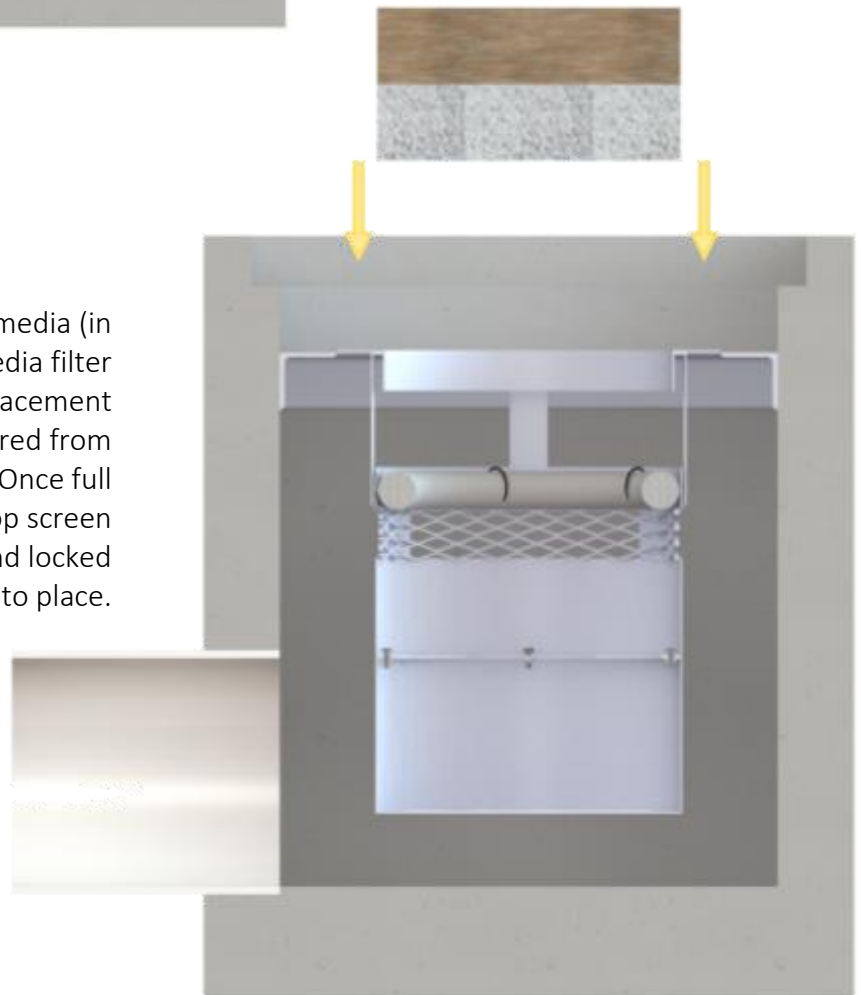



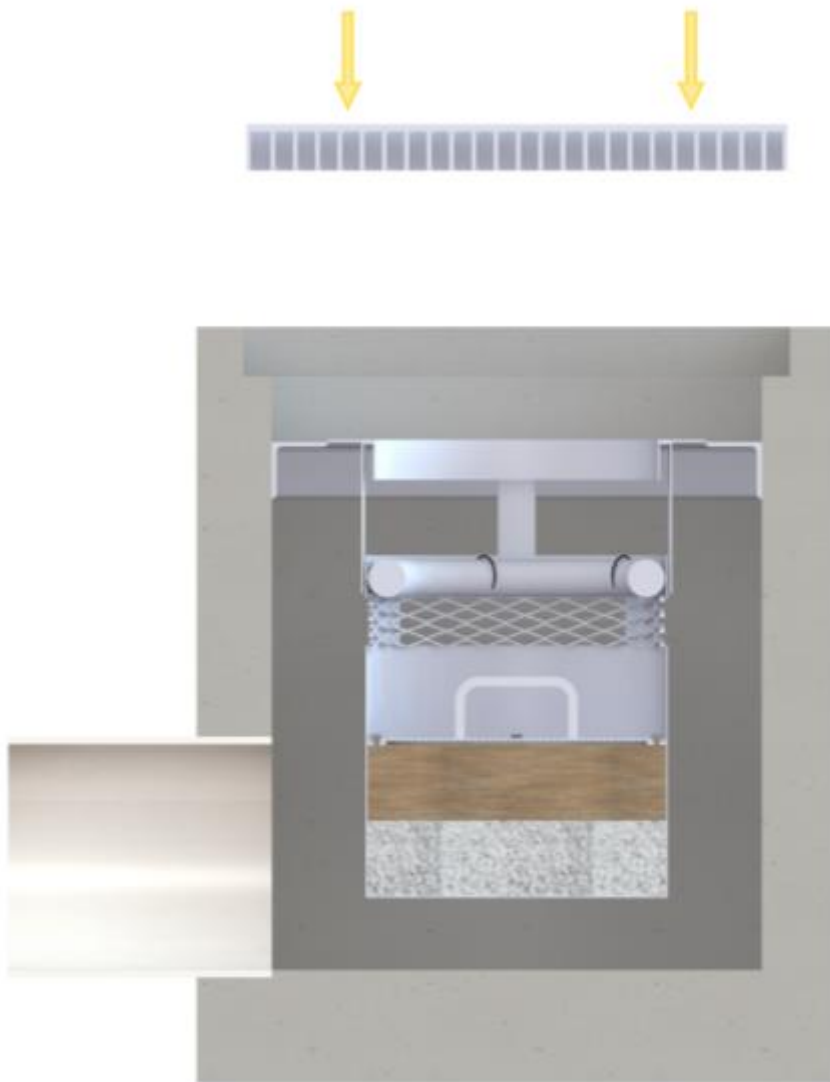

Close up and replace the grate and remove all traffic control. All removed debris and pollutants shall be disposed of following local and state requirements.

For Maintenance Services or  
Information Please Contact Us At:  
760-433-7640  
Or Email:  
[info@biocleanenvironmental.com](mailto:info@biocleanenvironmental.com)

## Inspection and Maintenance Report Catch Basin Only

Project Name \_\_\_\_\_

Project Address \_\_\_\_\_ (city) (Zip Code)

Owner / Management Company \_\_\_\_\_

Contact \_\_\_\_\_ Phone ( ) - \_\_\_\_\_

Inspector Name \_\_\_\_\_ Date \_\_\_\_ / \_\_\_\_ / \_\_\_\_ Time \_\_\_\_\_ AM / PM

Type of Inspection     Routine     Follow Up     Complaint     Storm    Storm Event in Last 72-hours?         ps

Weather Condition \_\_\_\_\_ Additional Notes \_\_\_\_\_

For Office Use Only

---

(Reviewed By) \_\_\_\_\_

---

(Date) \_\_\_\_\_  
Office personnel to complete section to the left.

Site Map #	GPS Coordinates of Insert	Catch Basin Size	Evidence of Illicit Discharge?	Trash Accumulation	Foliage Accumulation	Sediment Accumulation	Signs of Structural Damage?	Functioning Properly or Maintenance Needed?
1	Lat: _____							
	Long: _____							
2	Lat: _____							
	Long: _____							
3	Lat: _____							
	Long: _____							
4	Lat: _____							
	Long: _____							
5	Lat: _____							
	Long: _____							
6	Lat: _____							
	Long: _____							
7	Lat: _____							
	Long: _____							
8	Lat: _____							
	Long: _____							
10	Lat: _____							
	Long: _____							
11	Lat: _____							
	Long: _____							
12	Lat: _____							
	Long: _____							

Comments: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_